


OVERHEAD EXHAUST SYSTEM SPECIFICATION AND INSTALLATION

FEATURES:

- A Duct connector TE6500 will connect to 5" "T" or stub. Extend "T" or stub to increase length of unit.
- B Double hook for easy lowering and raising.
- C Internal Sleeve Connector TE6538.
- D RA 300 Universal Adapter will fit all single and most twin tailpipe configuration. Three locking snaps allow unit to be shut off. Will not damage any vehicle and is 100% Crushproof™.
- E 6" I.D x 5'6" Crushproof™ 600 Garage Exhaust Hose.
- F 4 1/2" I.D. x 5'6" Crushproof™ 600 Garage Exhaust Hose.
- G 3" I.D. x 5'6" Crushproof™ 600 Garage Exhaust Hose. Extended length of unit is 17 feet.

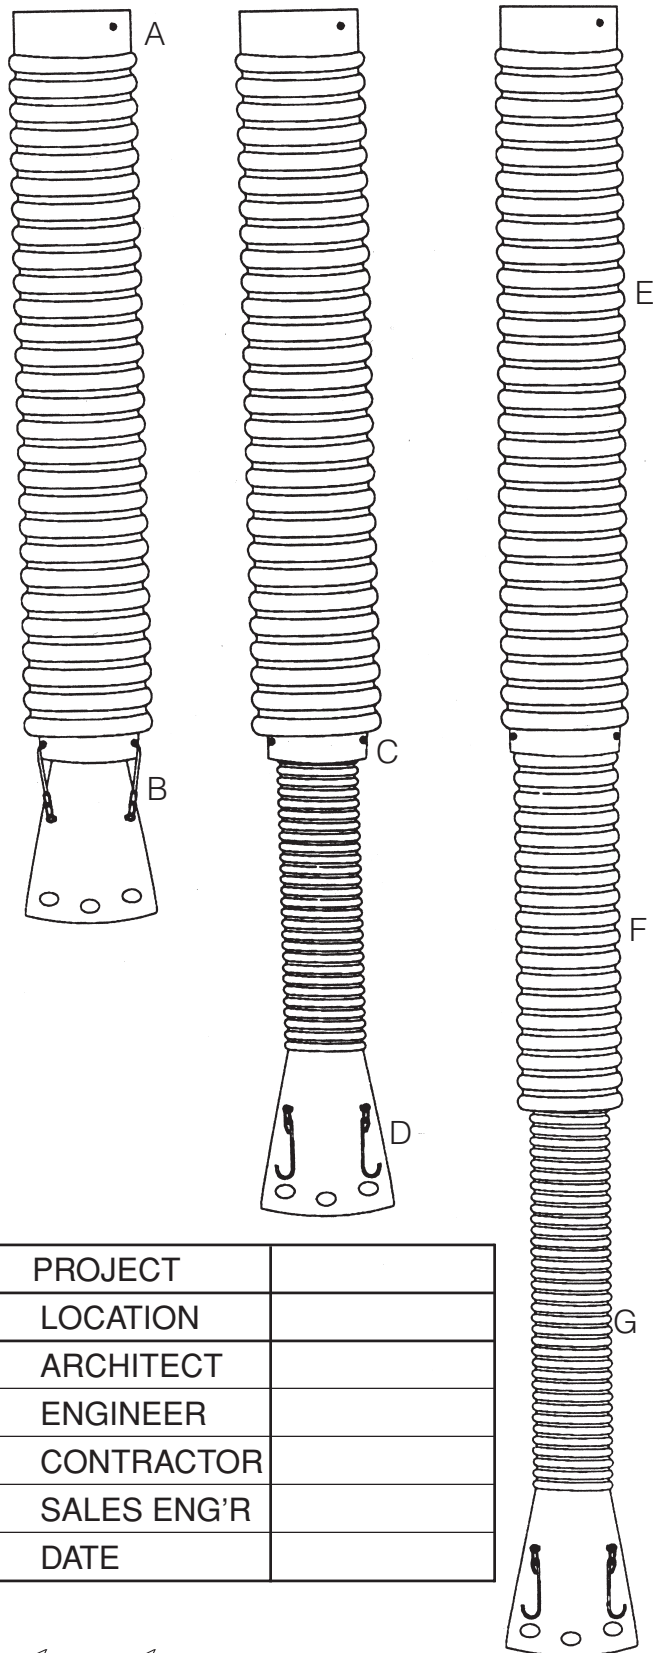

NOTE: Hoses can be shortened for low ceilings

SCHEDULE				PROJECT	
ITEM	QTY.	MODEL	DESCRIPTION	LOCATION	
				ARCHITECT	
				ENGINEER	
				CONTRACTOR	
				SALES ENG'R	
				DATE	

