





FIVE MODELS AVAILABLE

All models may be ceiling, floor or wall mounted. They can be connected directly to a central system when a wall bracket is used by a flange adaptor.

ALL DIAGRAMS ARE NOT TO SCALE


FRICITION JOINTS

- 1 360° swivel elbow (less when wall mounted).
- 2 180° vertical friction joint.
- 3 230° vertical friction joint.
- 4 Four-way friction joint, 240° + 240°.
- 5 340° horizontal friction joint.
- 6 Four-way friction joint, 180° + 220°.

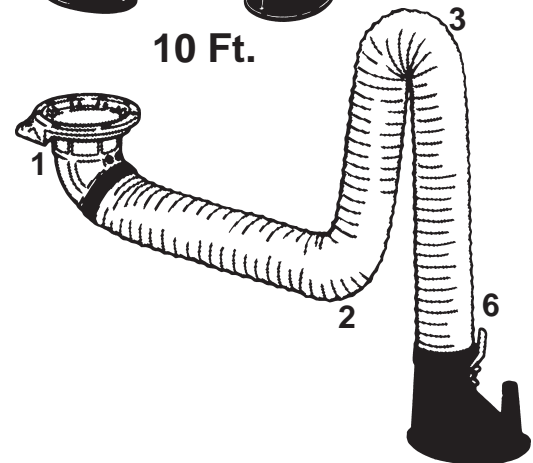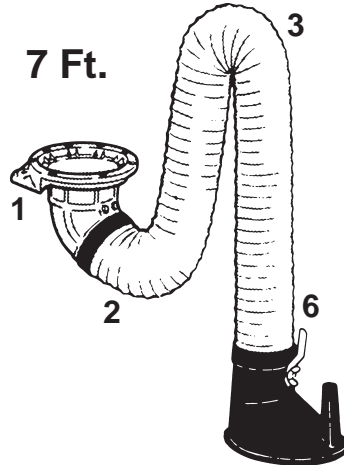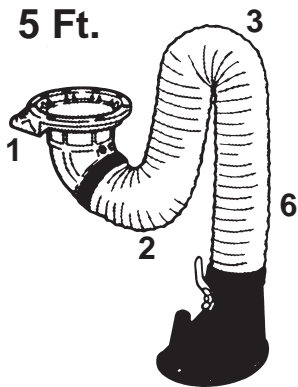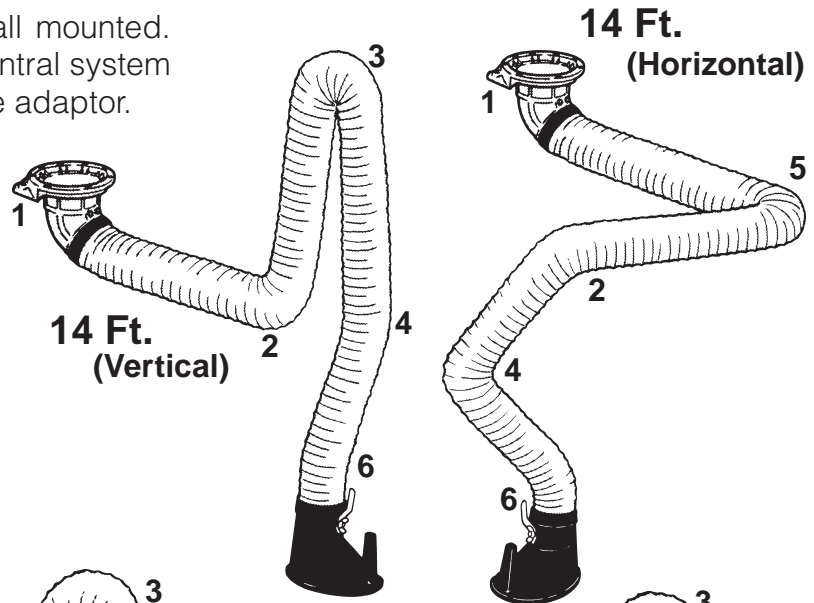


MOUNTING EXAMPLES

STANDARD WALL MOUNTING BRACKET

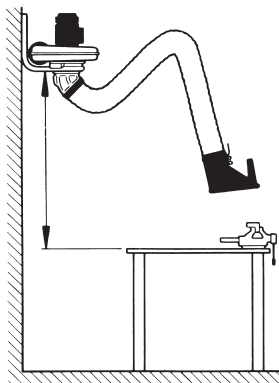

CEILING MOUNTING

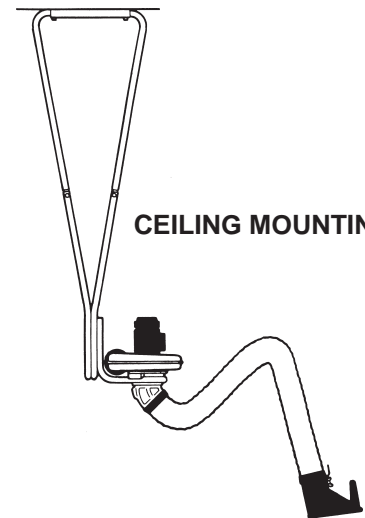

WALL MOUNTING, FUME EXTRACTOR WITH EXTENSION ARM

